


Evaluation of Reclamation Concepts at the Greens Creek Mine Admiralty Island, Alaska

Pete Condon
Petros GeoConsulting Inc.
Fairbanks, Alaska

18th MEND ML/ARD Workshop
November 30-December 1, 2011
Vancouver, BC, Canada

Outline

- Overview
- Consolidation of waste rock sites
- Co-disposal (waste rock & tailings)
- In situ treatment (sulfate reduction)
- Cover design
- Conclusions

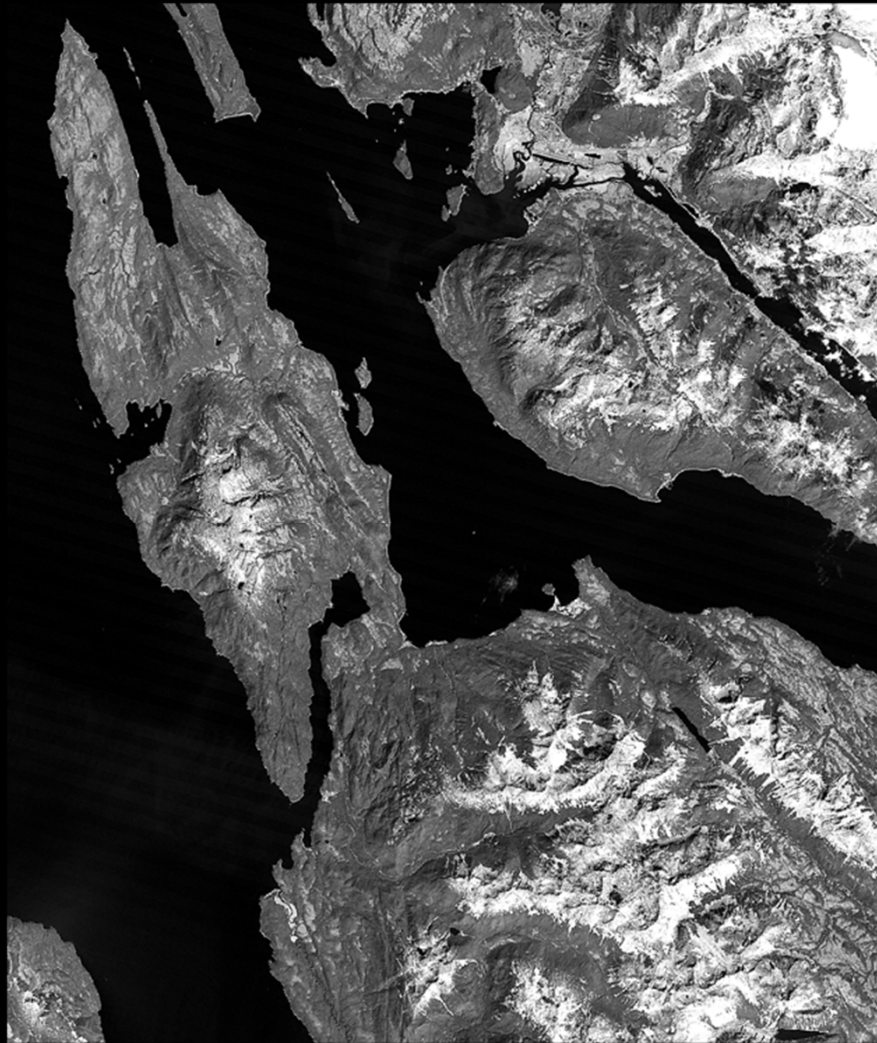

(Greens Creek file)

View of northern Admiralty Island, Juneau (upper right)
Greens Creek Valley (lower center)

Overview

- Underground Ag, Zn, Au, Pb mine
- Admiralty Island near Juneau, AK
- Production since 1989
- 7+ years remaining (exploration continues)
- 6.0 million tons surface tailings
- 1.7 million tons surface waste rock



View of Greens Creek valley and mine area



(Greens Creek file)

View of Greens Creek waste rock pile (left), mill complex (top) and mine portals (right)

Consolidation of waste sites

- Reduces area of environmental risk
- Minimizes impact to receiving waters
- Reduces reclamation (cover) costs
- Relocation of > 600K tons (~ 50 acres) planned



(Greens Creek file)



(Greens Creek file)

View of Greens Creek waste rock pile removal (left) and replacement of pyritic rock with non-pyritic fill (upper right)



(Greens Creek file)

View of waste rock removal at 960 site near mine portal

Site 347		Before Removal	After Removal	After Removal	After Removal
Parameter	Unit	9/12/95	9/28/06	8/17/09	6/17/10
pH	st. units	6.1	7.6	7.5	7.3
Sulfate	mg/l (tot)	1300	161	230	136
Calcium	mg/l (diss)	412	64	102	64
Magnesium	mg/l (diss)	164	21	28	21
Iron	mg/l (diss)	5.5	0.2	ND	0.61
Manganese	mg/l (diss)	7.1	0.4	0.272	0.196
Zinc	mg/l (diss)	11	0.1	0.054	0.035
Lead	mg/l (diss)	0.004	ND	0.00008	ND
Nickel	mg/l (diss)	0.3	0.005	0.007	0.0015

Improvement in drainage quality after removal of waste rock from the 960 site near the mine portal (HGCMC, 2011)

Co-disposal of waste rock and tailings

- Reduces advective transport of oxygen and subsequent sulfide oxidation
- Improves tailings strength
- Reduces tailings permeability
- A 3:2 mix of waste rock and tailings had a permeability of 5×10^{-6} cm/s and friction angle of 43° versus 3.4×10^{-5} cm/s and 36° , respectively, for 100% tailings (Klohn Crippen Consultants Ltd., 2005)
- Blending is easily achieved with current placement equipment (bulldozer)




(Greens Creek file)



(R. Friedel)

Photographs of co-disposal test columns and co-disposal field trial

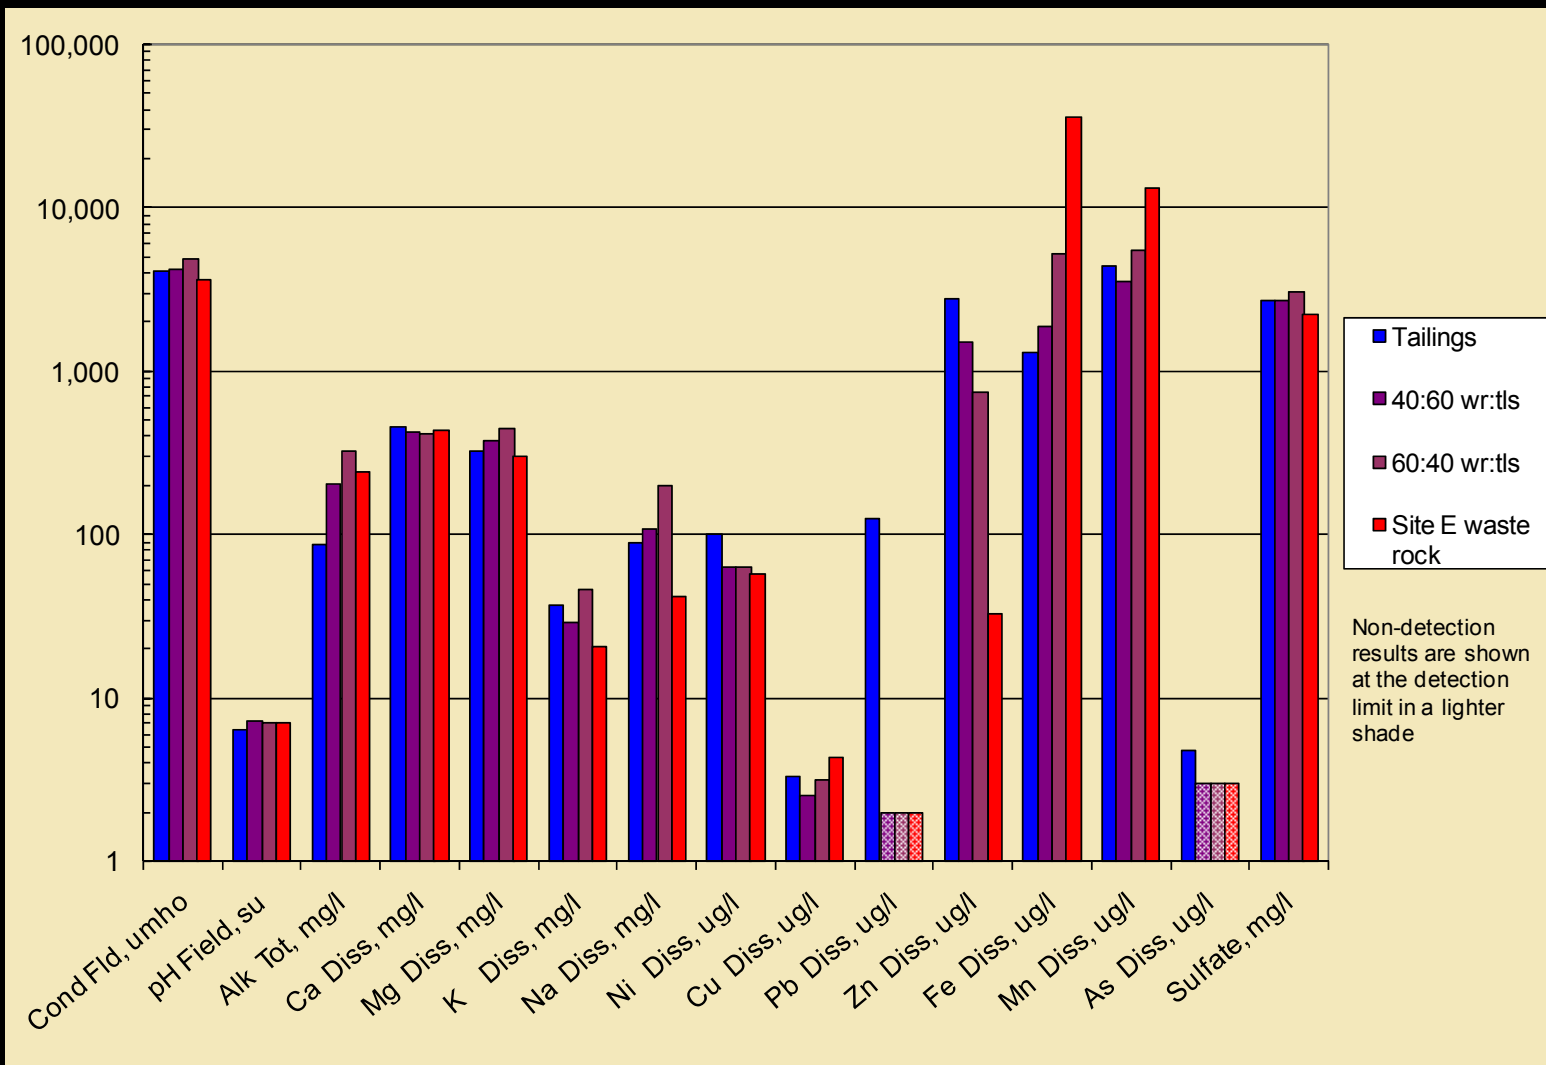

Results of co-disposal test columns (Greens Creek file)



(Greens Creek file)

View of Greens Creek tailings pile (~60 acres)



Views of tailings placement on the Greens Creek dry-stack tailings pile. Filter-pressed tailings are spread with a bulldozer and compacted to > 90% standard Proctor density with a vibratory roller.

In situ treatment (sulfate reduction)


(Lindsay and Blowes, 2011)

- Tested addition of peat, spent brewing grain, municipal biosolids to tailings (5-10 vol %)
- Improved pore water quality; reduced sulfate, metals and trace element concentrations; increased alkalinity
- May reduce time required to meet water quality targets
- Not recommended for oxidized materials due to reductive mobilization of Fe, As and other elements




(M. Lindsay)


View of carbon amendment test cells and instrumentation on the Greens Creek tailings pile

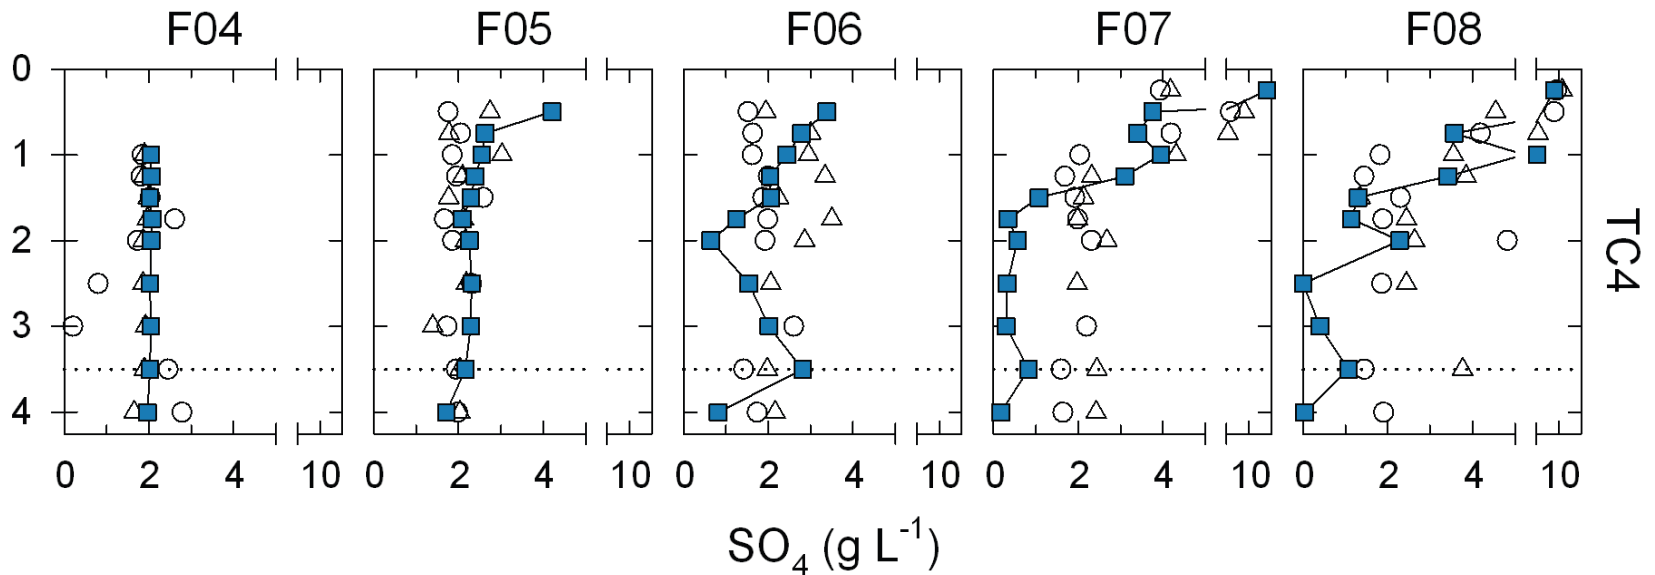

Results of addition of 2.5 vol % peat and 2.5 vol % spent brewing grain (squares), non-amended control (triangles), non-excavated control (circles), dotted line indicates lower extent of treatment, depth in meters (from Lindsay and Blowes, 2011)

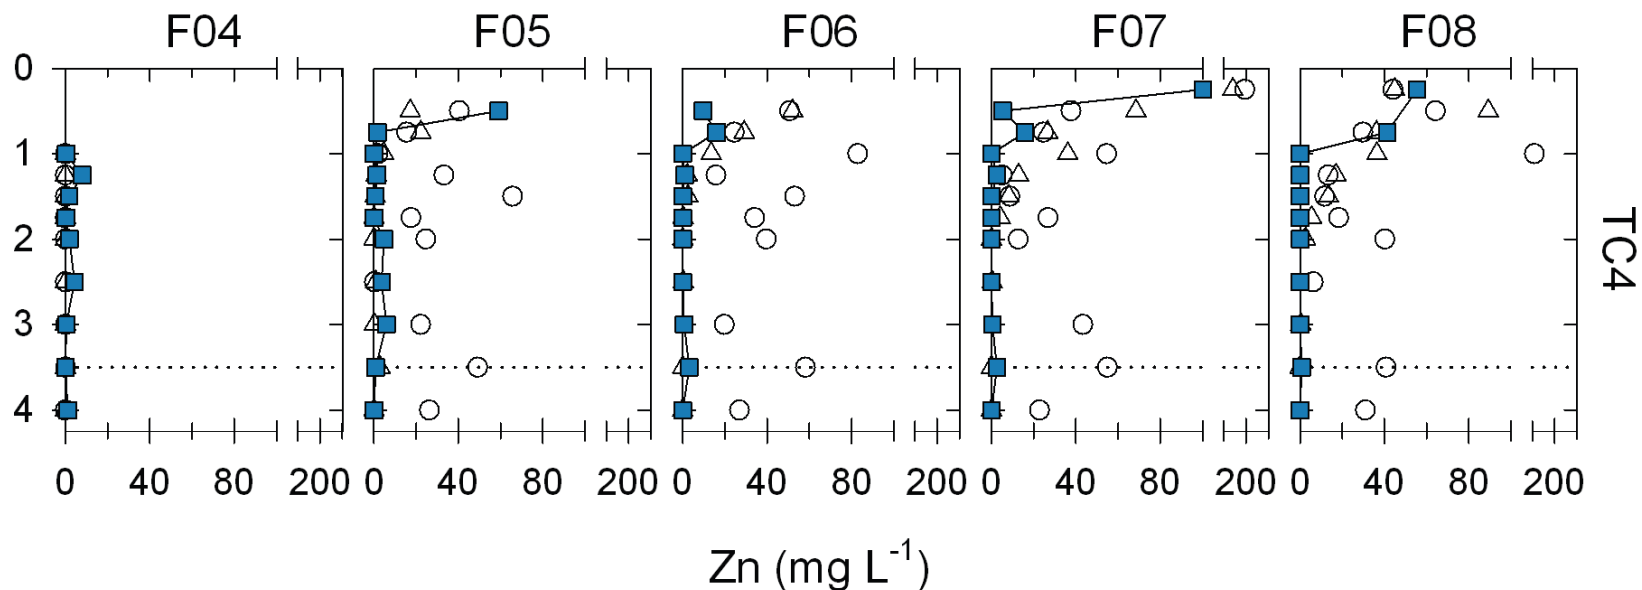

Results of addition of 2.5 vol % peat and 2.5 vol % spent brewing grain (squares), non-amended control (triangles), non-excavated control (circles), dotted line indicates lower extent of treatment, depth in meters (from Lindsay and Blowes, 2011)

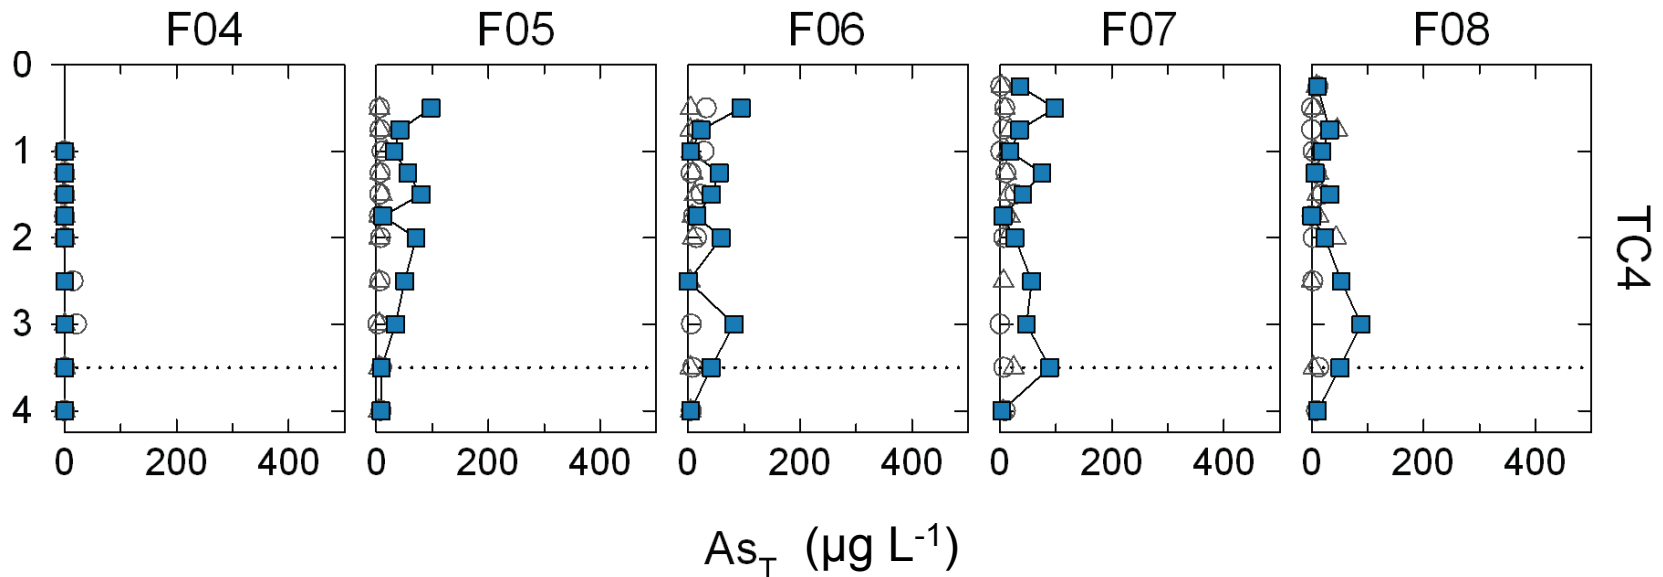

Results of addition of 2.5 vol % peat and 2.5 vol % spent brewing grain (squares), non-amended control (triangles), non-excavated control (circles), dotted line indicates lower extent of treatment, depth in meters (from Lindsay and Blowes, 2011)


Cover design

- Reduces advective and diffusive oxygen transport and subsequent sulfide oxidation
- Prevents contact of runoff with tailings and waste rock
- Allows for re-establishment of native spruce-hemlock forest



(Greens Creek file)

Cover Design

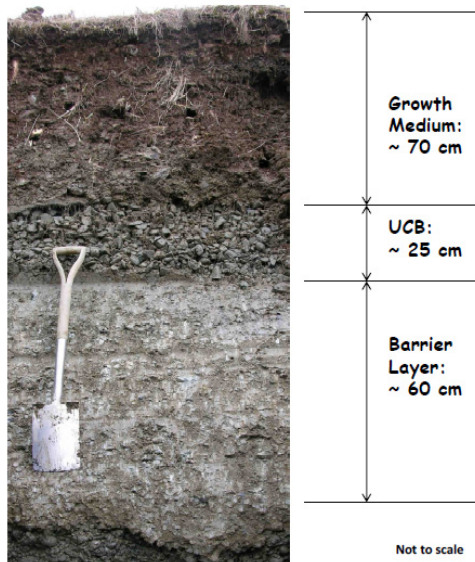

Growth
Medium:
~ 70 cm

UCB:
~ 25 cm

Barrier
Layer:
~ 60 cm

Not to scale

(L. Hopp)

Growth Medium

Capillary Break

Barrier Layer

Capillary Break

2 meters

Cover study (Hopp et al., 2011)

- HYDRUS-2D was used to model relative importance of key cover components and alternative cover designs; agrees with field data
- At least 1 meter of growth medium is recommended to allow for re-establishment of native spruce/hemlock forest
- Upper capillary break is necessary to accommodate drainage in wet climate
- Barrier layer permeability of $< 1 \times 10^{-6}$ cm/s is necessary to achieve cover percolation rates of $< 10\%$ of annual precipitation
- Cover cost is approximately \$110,000/acre, ~75% of which is for imported capillary break material

Conclusions

- Consolidation of waste rock sites reduces environmental risk and can reduce closure costs
- Co-disposal of waste rock and tailings minimizes pyrite oxidation, improves tailings strength and reduces tailings permeability
- In situ treatment of tailings with amendment of 5 vol% organic carbon (peat + spent brewing grain) improves pore water quality and may reduce the time required for drainage to meet water quality targets
- Effective cover performance is necessary to limit oxygen transport, minimize water contact with tailings and waste rock and promote re-establishment of native spruce-hemlock forest
- Reductive dissolution can lead to Fe, As and other trace element mobility

References and other resources

Greens Creek annual reports:

<http://dnr.alaska.gov/mlw/mining/largemine/greenscreek/index.htm>

Hecla Greens Creek Mine, 2011a, Tailings and production rock site 2010 annual report, (unpublished Greens Creek report to regulatory agencies), April 15, 2011.

Hecla Greens Creek Mine, 2011b, Inactive production rock sites and quarries 2010 annual report, (unpublished Greens Creek report to regulatory agencies), April 15, 2011.

Hopp, L., Giesen, T., and McDonnell, J., 2010, Hydrological performance of cover systems at the Greens Creek Mine: combined field-modeling analysis, final project report, (unpublished Oregon State University report to Greens Creek), June, 2010.

Klohn Crippen Consultants Ltd., 2005, Evaluation of co-disposal of production rock and filter-pressed tailings, (unpublished report to Greens Creek) May 16, 2005.

Lindsay, M., and Blowes, D., 2011, Investigations into tailings pore-water treatment at the Greens Creek Mine, Alaska, USA, final report on SRMP research: 2004-2008 (unpublished University of Waterloo report to Greens Creek), March 16, 2011.

References and other resources

- Condon, P. and Lear, K. 2006. Geochemical and geotechnical characterization of filter pressed tailings at the Greens Creek Mine, Admiralty Island, Alaska. Proceedings of the 7th International Conference on Acid Rock Drainage, St. Louis, MO, USA, March 26-30, 2006.
- Hopp, L., McDonnell, J. and Condon, P. 2011. Lateral subsurface flow in a soil cover over waste rock in a humid temperate environment. *Vadose Zone Journal* Volume 10, January 19, 2011.
- Lindsay, M., Condon, P., Jambor, J., Lear, K., Blowes, D., Ptacek, C. 2009. Mineralogical, geochemical, and microbial investigation of a sulfide-rich tailings deposit characterized by neutral drainage. *Applied Geochemistry* 24, 2212-2221.
- Lindsay, M., Blowes, D., Condon, P., Ptacek, C. 2009. Managing pore-water quality in mine tailings by inducing microbial sulfate reduction. *Environmental Science & Technology* 43, 7086–7091.
- Lindsay, M., Blowes, D., Condon, P., Lear, K., Ptacek, C. 2009. Organic carbon amendment of tailings for passive in situ management of pore-water quality. *Securing the Future and 8th International Conference on Acid Rock Drainage*, Skellefteå, Sweden, June 22–26, 2009.
- Lindsay, M., Blowes, D., Condon, P., Ptacek, C. 2009. Organic carbon amendment of mine tailings for attenuation of sulfide-mineral oxidation products. 2009 GSA Annual Meeting, Portland, OR, USA, October 18–21, 2009.



Acknowledgements:

Hecla Greens Creek Mining Company

Matt Lindsay, Dave Blowes (University of Waterloo)

Luisa Hopp, Jeff McDonnell, Tom Giesen (Oregon State University)

O'Kane Consultants Inc.

Ward Wilson (University of Alberta)

Klohn Crippen Berger Ltd.